




Samsung Galaxy Nexus SIM Card Replacement

This guide is to help you remove and input a new Sim Card.

Written By: Stephan Williams

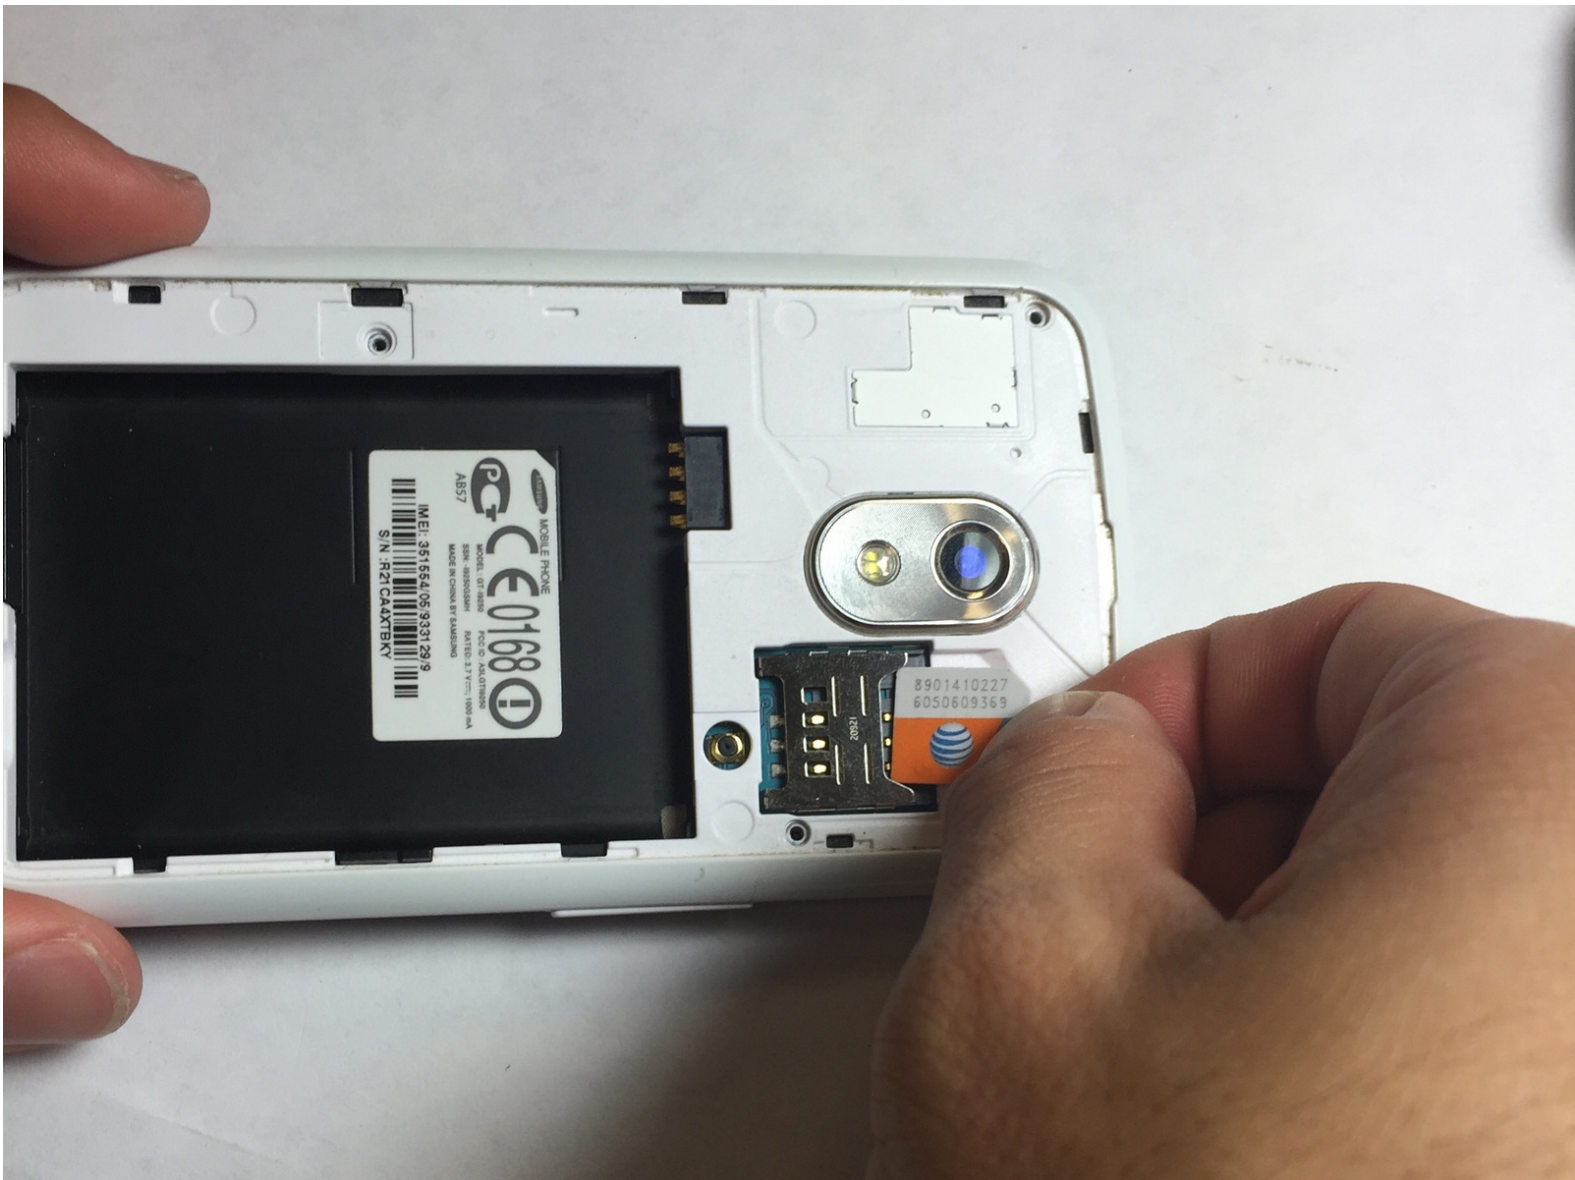

INTRODUCTION

Are you not able to make any calls or send text messages?

Then, this guide will help you replace or insert a new Sim card onto your Galaxy Nexus.



TOOLS:

- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)



PARTS:


- [Sim Card from Verizon](#) (1)
-

Step 1 — Back of Phone




- You must open the back of the phone to access the battery. To do this use the plastic opening tools or your fingernail and insert it into the divot.

Step 2 — Removal of Back Cover

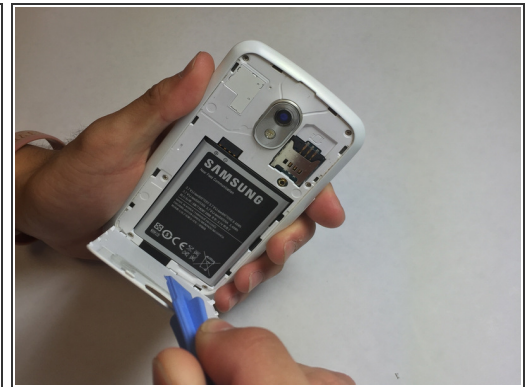


- Remove the back cover of the phone by moving the prying tool or your fingernail away from the phone while it is still in the divot.

Step 3 — Removal of Battery

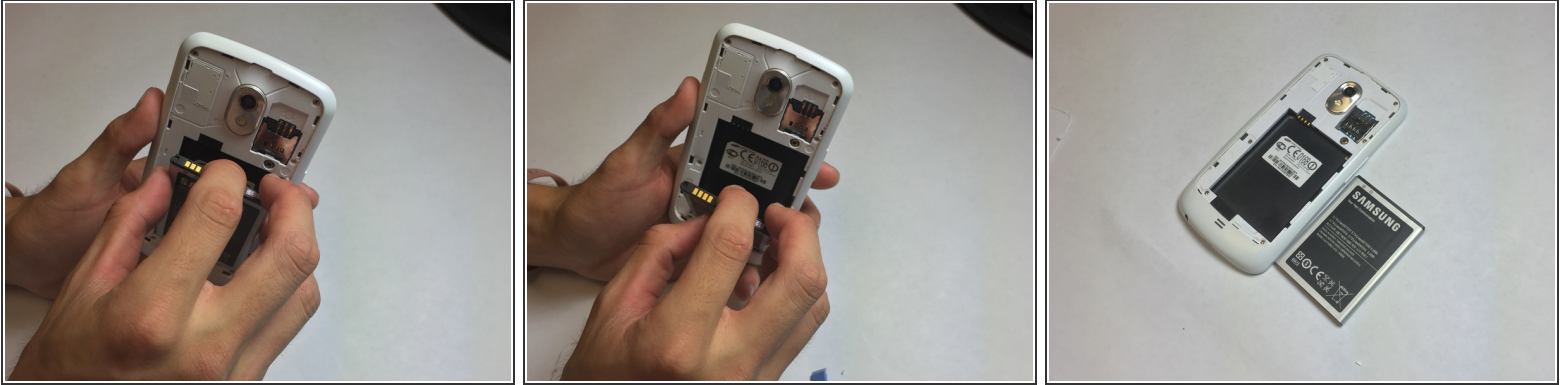

- Insert your finger into the divot of the battery and pull the battery towards yourself to remove.
- This is when a new battery will be inserted.

Step 4 — Back Cover of Phone

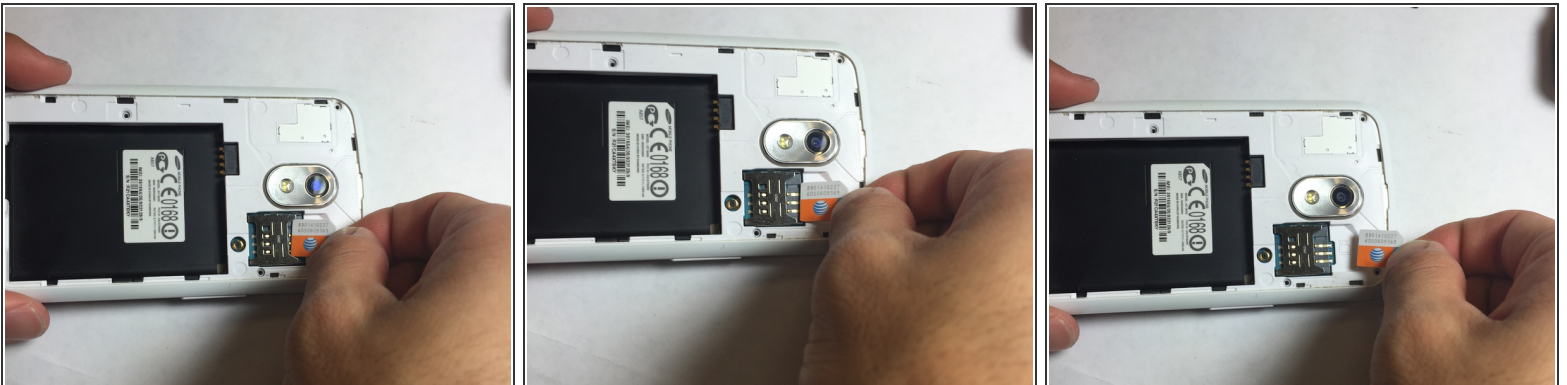

- Using your fingers pull the Sim card out.
- ⓘ This is a Verizon phone, however we are using a AT&T Sim card as an example as to where to put the sim card.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-24 01:59:47 PM.